

# WIND RIVER

## Aeris 52" Indoor Tunable White LED Ceiling Fan

Model: WR1602MW



Included Handheld  
Remote Control

\*Light Kit Cap Included



### SPECIFICATIONS

|                 |             |               |                         |
|-----------------|-------------|---------------|-------------------------|
| Motor Type      | AC Motor    | Control Type  | Handheld Remote Control |
| Motor Size (mm) | 153 x 15    | Reverse Type  | Manual Reverse          |
| Motor Finish    | Matte White | Mounting Type | Downrod                 |
| Fan Speeds      | 3           | Weight        | 13.82 lbs               |

### LIGHT KIT SPECIFICATIONS

|                 |                     |
|-----------------|---------------------|
| Light Source    | Integrated LED      |
| Bulb Type       | Tunable White LED   |
| LED Temperature | 3000K, 4000K, 5000K |
| Lens Material   | Acrylic             |
| Lens Finish     | Frosted Opal        |
| Lumens          | 1612                |

### BLADE SPECIFICATIONS


|                      |             |
|----------------------|-------------|
| Blade Sweep (inches) | 52"         |
| Number of Blades     | 4           |
| Blade Material       | Plywood     |
| Blade Pitch          | 12°         |
| Blade Finish         | Matte White |

### SHIPPING SPECIFICATIONS

|              |                        |
|--------------|------------------------|
| Gross Weight | 15.80 lbs              |
| Box Size     | 24.41" x 9.72" x 9.45" |
| Cubic Feet   | 1.30 cu ft             |

### WARRANTY AND SAFETY

|                   |                           |
|-------------------|---------------------------|
| Warranty          | Limited Lifetime Warranty |
| ETL Certified     | Dry Rated                 |
| Electrical Rating | 120V, 60Hz                |

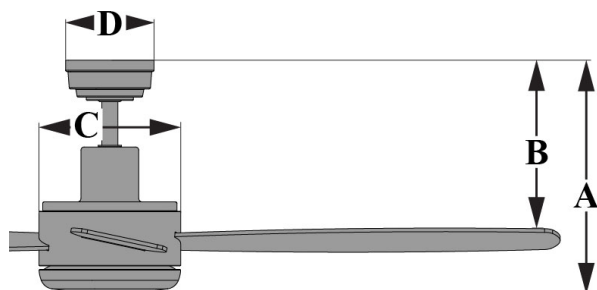

A: 13.4" B: 10.9" C: 8.2" D: 5.1"

| Speed  | Amps | Watts | RPM | CFM  |
|--------|------|-------|-----|------|
| Low    | 0.26 | 15.34 | 75  | 2030 |
| Medium | 0.39 | 33.40 | 120 | 3250 |
| High   | 0.52 | 62.73 | 164 | 4624 |

\*NOTE: These are approximate measures. They do not include amps and wattage used by the lighting kit.